



CRTRIRADP - Call Recording Adapter TRI


1. Introduction:

The TRI Recording Adapter provides a connection from your telephone to your Computer or Tape Recorder for recording your telephone conversation. It can be used with most telephone fitted with a modular handset cord. A level control is provided to allow you to adjust the record level.

The unit complies with Australian Communications Authority (ACA) requirements for Telecommunications Equipment and bears the mark, indicating compliance. It also has CE approval for the EU.

2. Installing your Telephone Recording Adaptor:

The drawing below shows a typical installation.

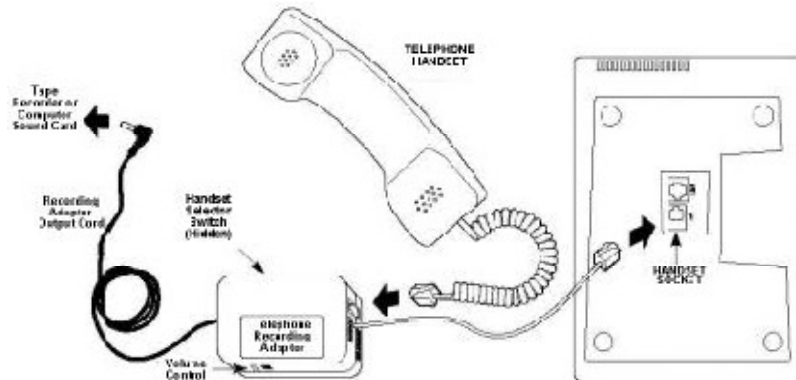

1. Unplug the telephone line.
2. Unplug the telephone handset cord from the telephone.
3. Plug the Adaptor telephone handset cord into the telephone handset socket.
4. Plug the Telephone handset cord into the handset socket on the Adaptor
5. Plug the telephone in the telephone line.
6. Check that the handset is working normally.
7. Plug the 3.5mm recording plug into the “line-in” or “Microphone” socket of your computer sound card or tape recorder.

3. Selecting the Handset Wiring

1. Dial a friend or information service where continuous receive voice can be heard.
2. Record a short period of voice with the handset selector switch in position 1 then position 2.
3. Play back the recording - noting in which position the voice is recorded and then select this position for the handset selector switch.

Your recording Adaptor is now ready to use.

4. Setting the Volume Control level

Record further voice and adjust the volume control on the Recording Adapter to ensure non-distorted voice is being recorded. Unplug the telephone handset cord from the telephone.

PRODUCT FEATURES AND SPECIFICATIONS:

Volume Control:	A Volume control allows the reduction in output level to the recorder if necessary
Isolation:	Compliant to ACA TS 001 and AS 3260 (3kV)
<u>Fixed Connectors</u>	Fixed four conductor flat telephone cable terminated with 4 Way Modular plug. (300mm long).
a) Telephone cable:	4 way modular socket
b) Handset socket	Fixed single conductor shielded cable terminated with a right angled 3.5mm stereo plug. (2.5m long)
c) 3.5mm cable to the recorder	
Handset Wiring Selector Switch	A two position selector switch allows the user to select the handset wiring type.

Warning: Please observe the laws of your territory as they relate to call recording.

To purchase please go to www.altoedge.com/callrec